

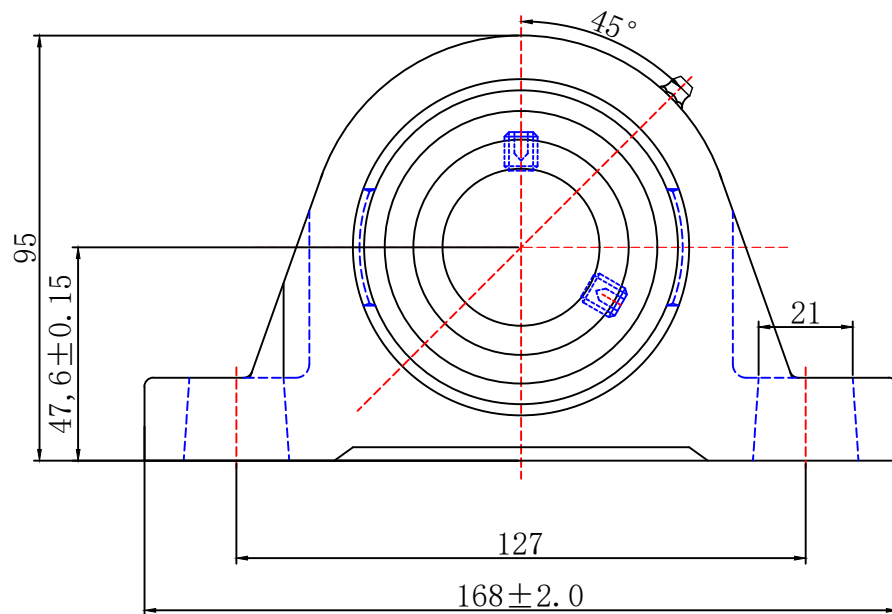


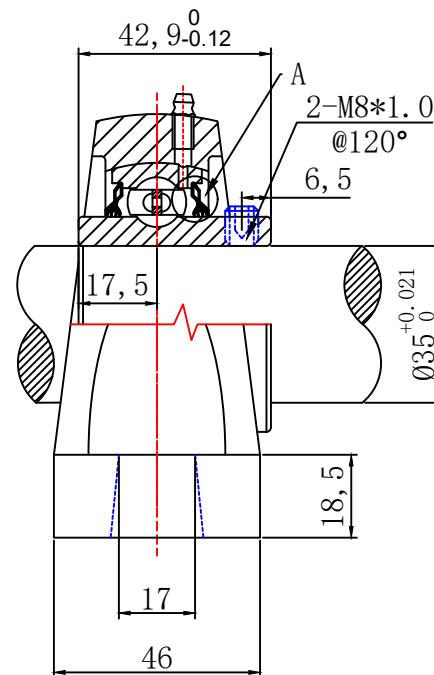

1. The basic load rating
 $C_r = 25700 \text{ N}$
 $C_{or} = 15400 \text{ N}$
2. Radial clearance
 Min: 13 μm
 Max: 33 μm
3. Fill grease quantity
 50%-60% (SHIFT)

A-A



MarKing	Number	Change File Number	Sign	Date
Designer	范金学		Standard	
Drawn	丁庆龙		Approval	张春文
Technology				
Checked			Date	2026.6.28

INSERT BEARING
WITH HOUSING

UCP207 L3 HHB

Pattern mark				weight (kg)	Scale
Total 1 Pages				Page 1	

HEBEI HAILAN BEARING CO., LTD